


SPLITTER UNIT 625

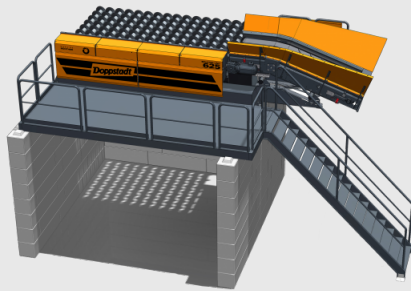

Applications

Like all machines belonging to this DOPPSTADT series the stationary SPLITTER UNIT can easily cope with a variety of materials. It is perfectly suited for commercial and industrial waste, wood, and green waste. For special applications the machine can be adapted to process scrap metal and slag as well.

DIMENSIONS

Chassis	Static
Total weight (kg)	9400
Length (mm)	9600
Width (mm)	2900
Height (mm)	1500
Transport width (mm)	2900
Transport height (mm)	1500
Transport length (mm)	9600

DRIVE

Engine type	electric
Make	Gearmotors
Motor power (kW / PS)	22 /

LOWER SCREENING DECK

Length (mm)	6000
Width (mm)	2500



Advantages

- Separation of less readily screenable material, including adjustment of screen gap
- Almost clog-free operation thanks to self-cleaning process
- Low maintenance costs due to robust, simple set-up
- Quick and easy exchange of screening deck modules serving a variety of applications
- Screening deck available in different lengths: 3,000, 4,000 and 6,000 mm